


## Renovation roof drain C


1. Place the seal ring in the guide groove on the outlet. All renovation roof drains from outlet size  $\varnothing 42$  mm have a guide groove. Outlet sizes under  $\varnothing 42$  mm have no groove.



2. The outlet or seal ring must not be greased or lubricated.
3. Ensure the cleanliness of the outlet on the old roof drain.
4. Push the outlet of the renovation roof drain inside the outlet of the old roof drain in a perpendicular direction.



5. The seal ring will roll out of the guide groove, sealing the joint between the old roof drain and the outlet of the renovation roof drain.

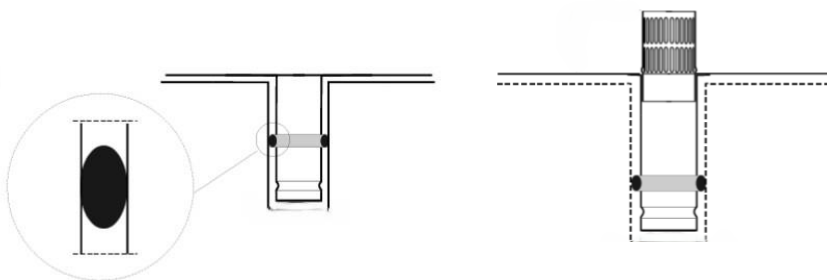

6. Following the installation of the renovation roof drain, the roofing contractor will ensure that the waterproofing is connected to the flange of the renovation roof drain.

**The difference between the outer diameter of the renovation roof drain outlet and the inner diameter of the old roof drain outlet must be approx. 10 mm.**

*Updated 18 November 2024*