

DryLine® Flex


Length made to order

Flat bottom or internal slope 0.5–5%

Outlet (diameter, length, position)

Accessories:

- Thermocable 25 W/m
- Sump unit (height x width, location)
- Sand separation

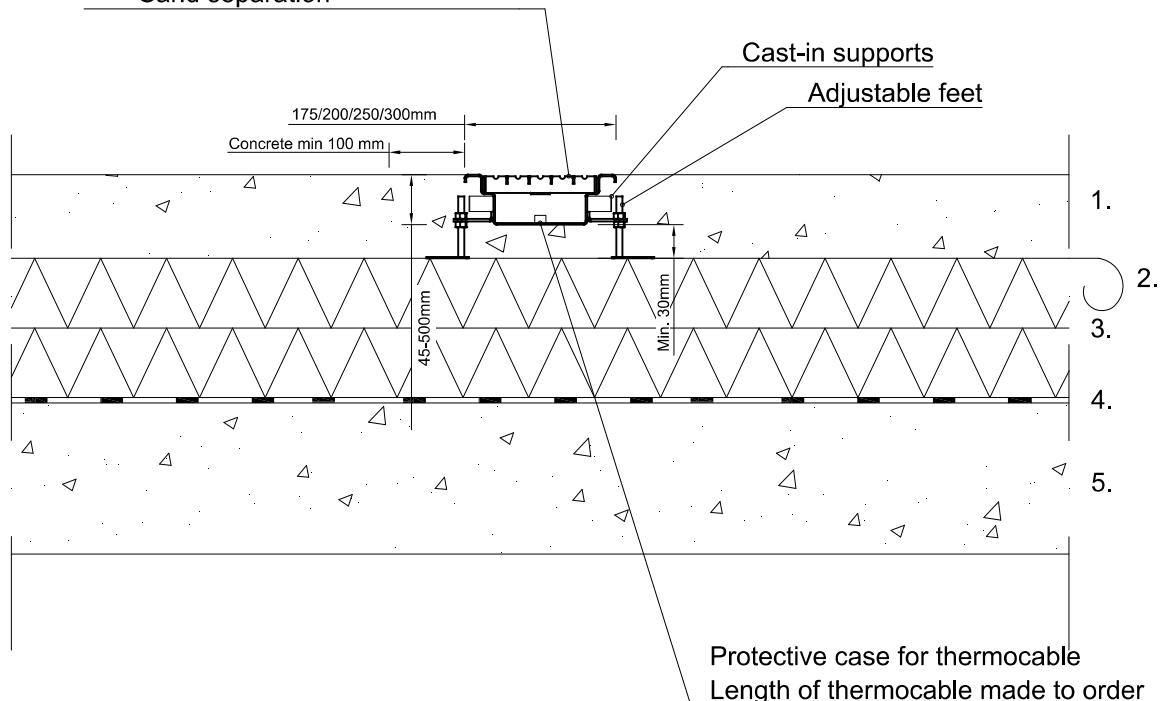

1. Reinforced concrete slab according to structural plan.

2. Geotextile according to structural plan.

3. Thermal insulation according to structural plan.

4. Waterproofing according to structural plan.

5. Load-bearing structure according to structural plan.