


Channel drain  
Mesh grating C250



DryLine Flex  
Length made to order  
Flat bottom or internal slope 0.5–5%  
Outlet (diameter, length, location)

Accessories:

- Thermocable 25 W/m
- Sump unit (height x width, location)
- Sand separation

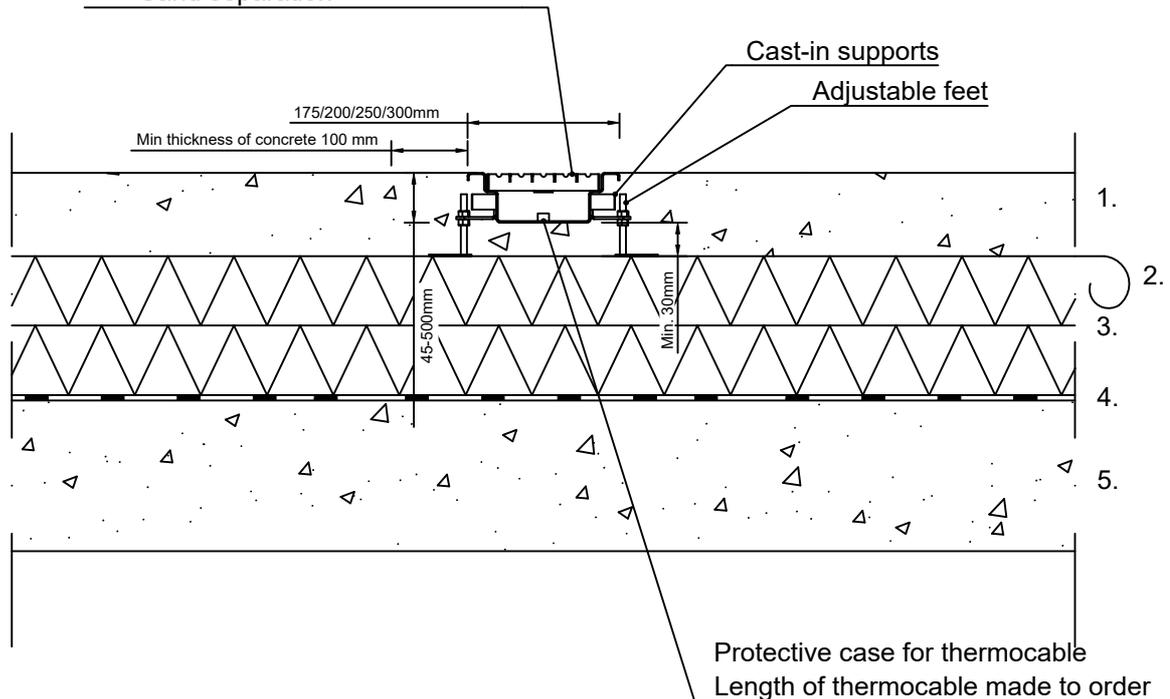

1. Reinforced concrete slab according to structural plan.
2. Filter fabric according to structural plan.
3. Thermal insulation according to structural plan.
4. Waterproofing according to structural plan.
5. Load-bearing structure according to structural plan.