
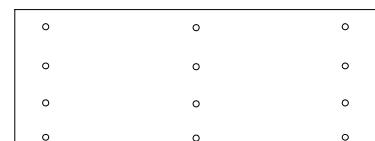


Height adjustment  
with adjustable extension ring  
Openings at the bottom  
of the extension ring


Cast-iron grate Ø500 mm  
Load capacity 40 t

Cast-iron frame Ø670 mm  
Load capacity 40 t


500/670  
H = made to order,  
acid-resistant




Sand bucket

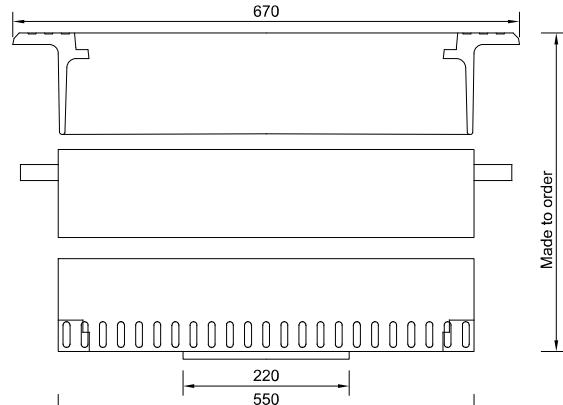

Made to order

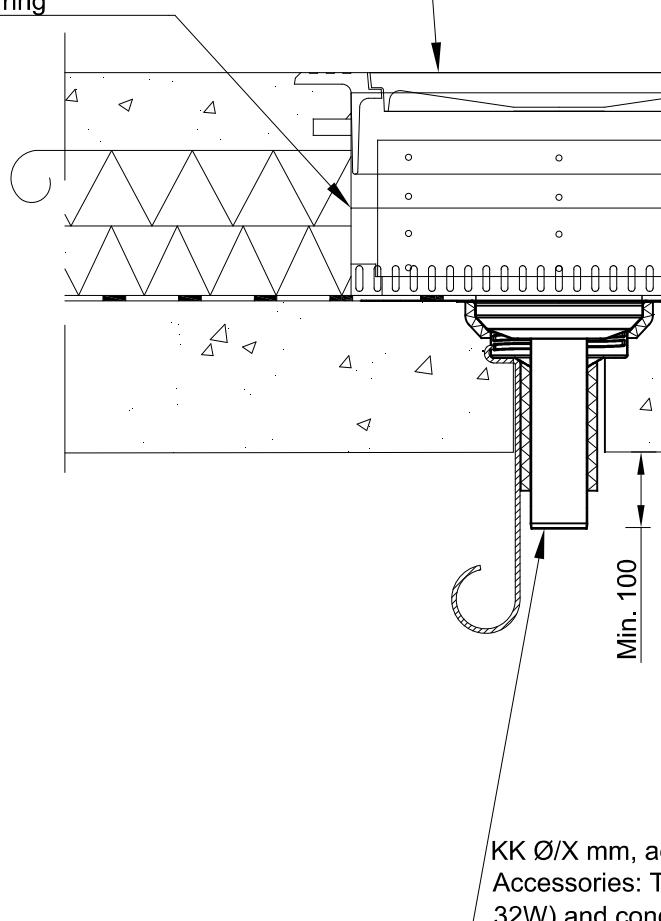

KK Ø/X mm, acid-resistant steel  
Accessories: Thermocable (16W or  
32W) and condensation insulation

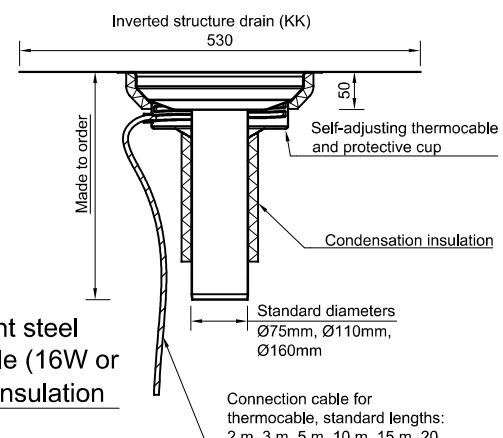

Standard diameters  
Ø75mm, Ø110mm,  
Ø160mm

Connection cable for  
thermocable, standard lengths:  
2 m, 3 m, 5 m, 10 m, 15 m, 20

1. Reinforced concrete slab according to structural plan.
2. Geotextile according to structural plan.
3. Thermal insulation according to structural plan.
4. Waterproofing according to structural plan.
5. Load-bearing structure according to structural plan.

Order/quote Peltitarvike Oy  
Myynti@peltitarvike.fi, +358 20 741 2770

1 pc KK Ø/X mm, thermocable and condensation insulation  
1 pc Screen structure 500/670, H = made to order