



- Tested according to the fall protection equipment standards EN 795:2012 Type A + C and CEN/TS 16415:2013 Type A + C.
- CE marked.
- Made of stainless steel.
- Dimensioned so that the loop remains at least 300 mm above the roof surface.
- Can be used as an individual anchor point or as part of a lifeline system. Max 4 users at the same time.

Alternative: PITO™ Greenline
lifeline system

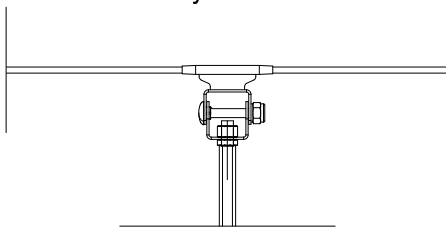

When fitting the nut, use the
assembly lubricant supplied with the anchor point
Tighten so that the loop locks between the nuts.

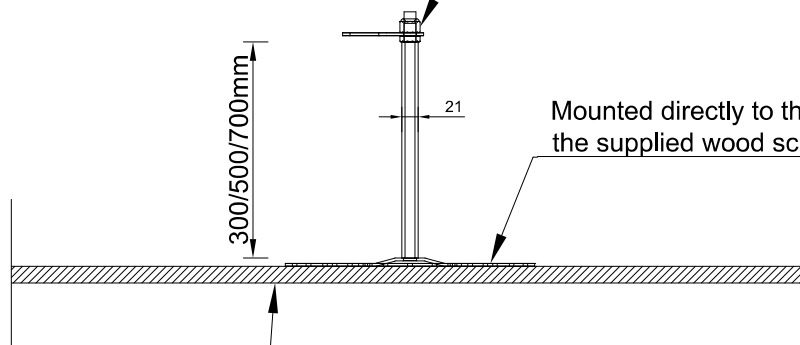

Mounted directly to the substructure using
the supplied wood screws (38 pcs)

May be installed on the following materials:

- OSB panel, min thickness 16 mm
- Plywood, min thickness 15 mm
- Boarding, min thickness 22 mm