


Balcony drain

Model PK

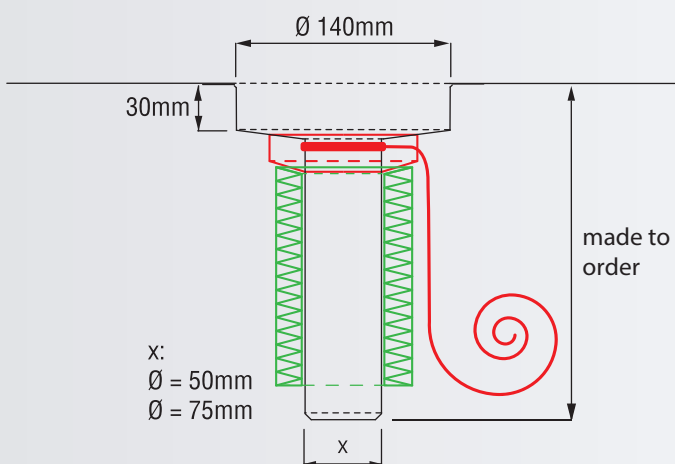

— condensation insulation — thermocable

Standard pipe heights available up to 1200 mm.
Other sizes are made to order

The European Committee for Standardisation CEN has not defined a harmonised standard (hEN) for roof drains that would allow the product to be CE marked. The product suitability is verified with site-specific validation.

Drain for balconies and terraces (inverted structure)

- Made of acid-resistant steel.
- Drains have primed flange.
- Vertical outlet

Accessories

- Leaf grate PK, perforated grate (140 mm) or other screen structure compatible with the drain
- Self-adjusting thermocable (16W/32W)
- Condensation insulation (13 mm cellular rubber)
- Bitumen flange

Maintenance instructions

Maintain screen structure according to the maintenance instructions of the product. Other maintenance needs according to the building maintenance book.