


DryLine® Modular channel drain

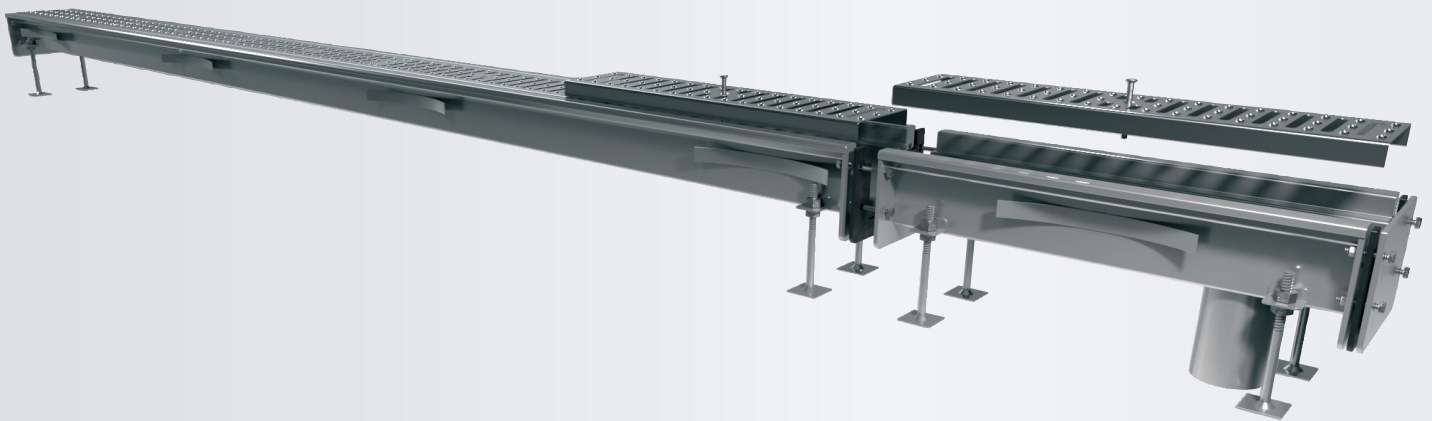

Channel drainage system made of standard-sized modules with quick delivery

Applications: car parks, courtyards, driveways, terraces, inverted structures.

- Material: stainless steel.
- Equipped with cast-in supports and mounting feet.
- Seven module options and three grating options (see next page).
- Modules and end plates are locked together with bolts and fitted with sealing flanges (EPDM or NBR). The fasteners are supplied with the modules.
- Always install on concrete.
- Meets the requirements of the EN1433 standard.

Accessories

- Self-adjusting thermocable placed in the protective case


Maintenance instruction

Remove and clean the gratings. Empty any stones and debris that have accumulated in the channel, check that the outlet is clean, and ensure that water can flow freely. Empty the sump unit and check the condition of the thermocable and protective case.

Module	Length	Width	Height	Outlet	LVI number
Modular 500	500 mm	175 mm	100 mm	-	3375206
Modular 1000	1000 mm	175 mm	100 mm	-	3375205
Modular 2500	2500 mm	175 mm	100 mm	-	3375202
Modular 2500 0,5%*	2500 mm	175 mm	75-87 mm	-	3375200
Modular 2500 0,5%*	2500 mm	175 mm	87-100 mm	-	3375201
Modular 500 with outlet	500 mm	175 mm	100 mm	bottom $\varnothing$ 110 mm	3375203
Modular 500 sump unit	500 mm	175 mm	350 mm	side $\varnothing$ 110 mm	3375204

Grating	Length	Width	Load capacity (EN 1433)	LVI number
Stainless steel slotted grating	500 mm	125 mm	A15	3381354
Stainless steel mesh grating	500 mm	125 mm	C250	3381352
Ductile iron slotted grating	500 mm	125 mm	C250	3381353

*0,5% internal slope

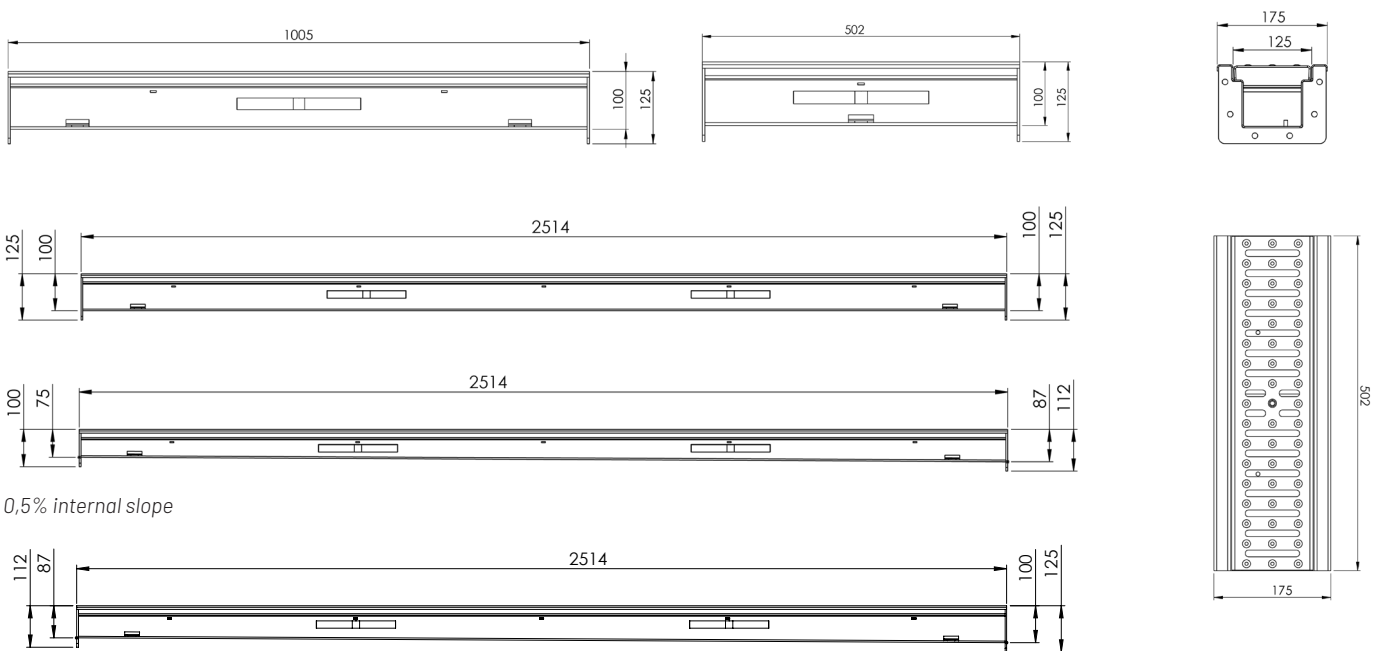

0,5% internal slope

0,5% internal slope

