


Heating element



Rated power W/m at different temperatures

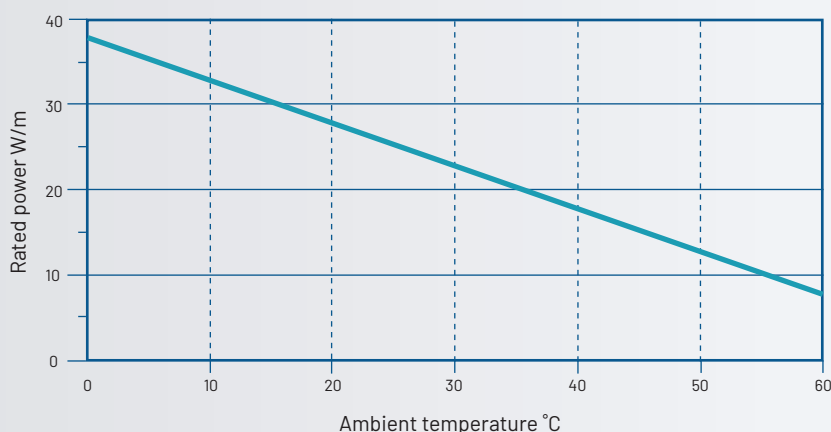

Heating element for the roof drain

- 230V/16W or 230V/32W.
- Contains self-adjusting thermocable with 2 m connection cable (also available in 3, 5, 10, 15, 20 ja 25 m).
- The size of the thermocable cup is determined by the diameter of the drain outlet.
- The heating elements are installed to the drains before delivering them to the customer.
- When installing the roof drain and connecting it to the waterproofing membrane, ensure that the internal temperature of the thermocable cup does not exceed +80°C.
- The electrical contractor connects the heating element to the electrical network. A measurement report must be prepared for the connection of the heating element.
- Thermocable or connection cable must not be installed directly into concrete casting. Special heating elements, such as those for concrete casting, are available on request.

Outlet ø	Thermocable cup ø
50 mm	125 mm
75 mm	125 mm
110 mm	160 mm
160 mm	190 mm

Version 15/2025