


PITO™ Stonekit counterweight anchor point

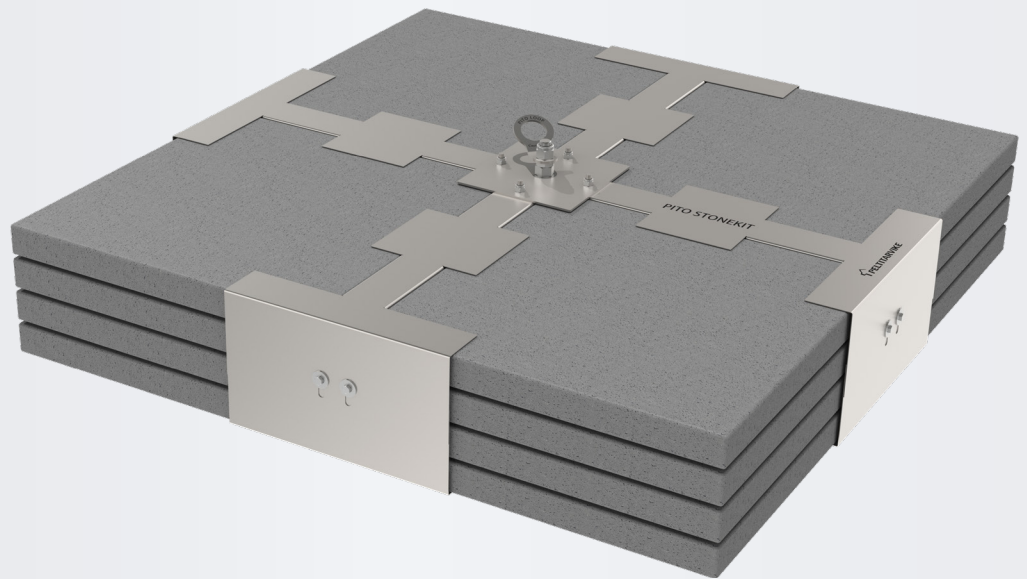

Side length 1060 mm

Height 200 mm

Reliable roof anchor point for fall protection

- Suitable for personal fall protection as a single anchor point or as a cable point of PITO™ Greenline lifeline system.
- Approved for two simultaneous users.
- Installation on top of the finished roof without the need to open the roof structure.
 - For flat roofs with up to 5° slope.
 - Substructure static load-bearing 450 kg/m².
- As a single anchor point, installation distance max. 7,5 m.
- As part of the lifeline system, installation distance max. 10 m.
- Concrete slabs 500x500x50 mm (16 pcs) or 500x500x40 mm (20 pcs) are used as weights. Weights are not included.
- CE marked.
- Tested according to personal fall protection equipment standard EN 795:2012 Type E.

Version 15/2025