


PITO™ Variant Uni roof anchor point



Pipe height 300, 500 or 700 mm

*Assembly lubricant

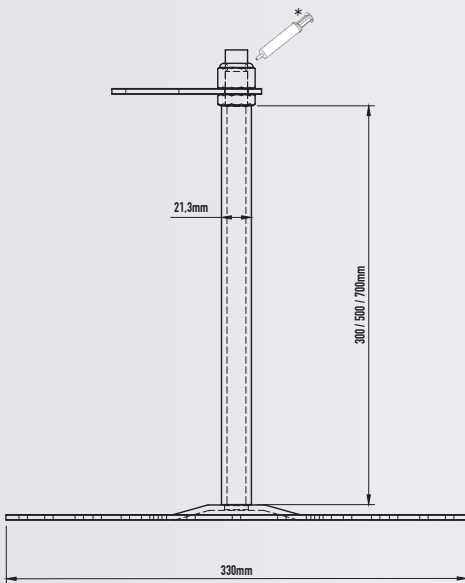

Reliable roof anchor point for fall protection

- Made of stainless steel.
- Suitable for personal fall protection as a single anchor point or as a cable point of PITO™ Greenline lifeline system.
- Approved for four simultaneous users.
- Fastening to OSB board, plywood or boarding. Fasteners are supplied with the anchor point.
 - OSB board thickness min. 16 mm.
 - Plywood thickness min. 15 mm.
 - Boarding thickness min. 22 mm.
- CE marked.
- Tested according to personal fall protection equipment standards EN 795:2012 Type A + C and CEN/TS 16415:2013 Type A + C.