


DryLine® Flex channel drain

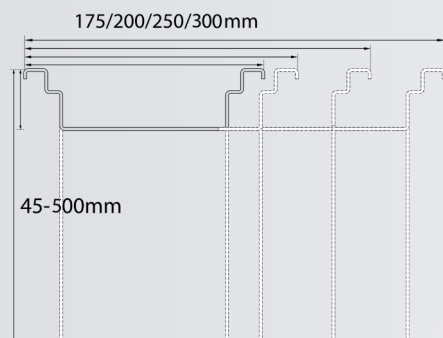

Length according to order

Outlet position bottom, end or side

Outlet diameter ø 50, 75 or 110 mm



A custom-made channel drain, with dimensions precisely tailored to your projects

Applications: car parks, courtyards, driveways, terraces, inverted structures.

- Material: stainless steel.
- All channel drains are equipped with cast-in supports and mounting feet.
- Three grating options for load capacity classes A15–C250.
- Over 10 m long channels are made of several channels with sealing flanges (EPDM or NBR)
- The channel can be manufactured with an internal slope according to the order.
- Installed in concrete.
- CE marked.
- Fills the requirements of EN 1433 standard.

Accessories

- Sump unit or sand separation
- Self-adjusting thermocable placed in the protective case

Maintenance

Remove and clean the grates. Clean the channel and outlets from stones, sand and debris and ensure that water can flow freely. Empty possible sump unit and check the condition of the self-adjusting thermocable and the protective case.

Grate	Load capacity class (EN 1433)		
	A15	B125	C250
Slotted grating (ductile iron)			200 mm 250 mm 300 mm
Slotted grating (stainless steel)		250 mm	175 mm 200 mm
Mesh grating (stainless steel)	175 mm 200 mm		

Version 38/2026