
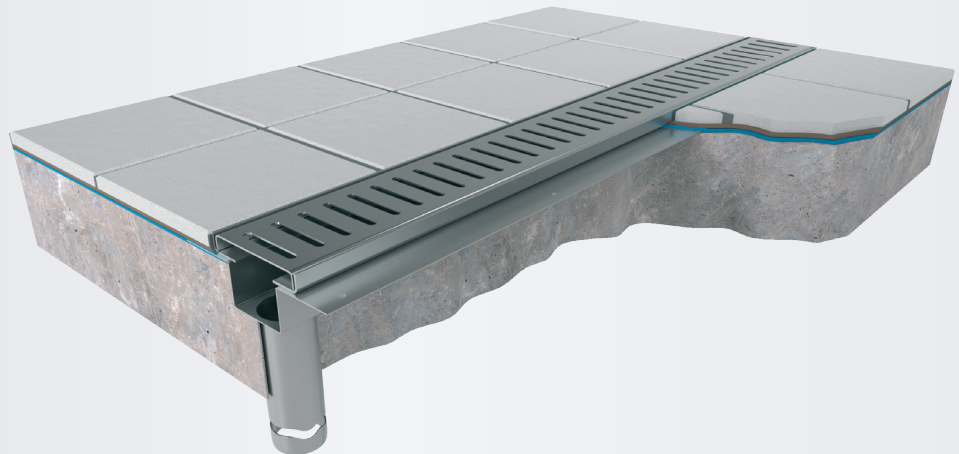


DryLine® Spa channel drain

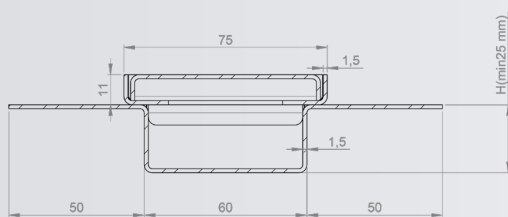

Height 25-200 mm
Length according to order
Outlet position bottom or end
Outlet diameter $\varnothing$ 50 mm

Tailored channel drain for liquid waterproofing products

- Material: stainless steel.
- Applications: swimming pools, terraces and balconies.
- Equipped with slotted grating (stainless steel).
- The channel can be manufactured with internal slope.
- Compatible with brush-on or spray-on waterproofing materials.
- The drain is connected to the liquid waterproofing by means of a waterproofing flange integrated in the channel drain.

Accessories

- Cast-in supports
- Mounting feet
- Self-adjusting thermocable

Maintenance

Remove and clean clogged gratings. Clean the channel and check the outlets for free water flow. Check the condition of the thermocable and the protective case.