
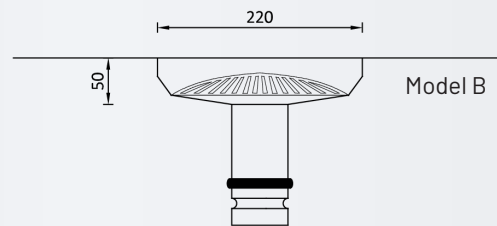


Renovation roof drain

Model PK/B

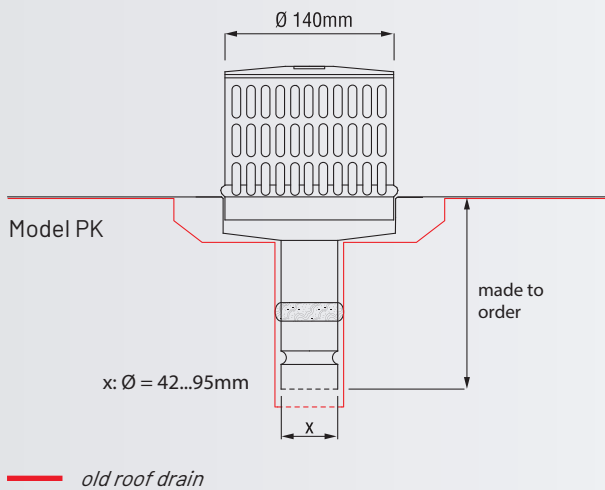

Other sizes are made to order

The European Committee for Standardisation CEN has not defined a harmonised standard (hEN) for roof drains that would allow the product to be CE marked. The product suitability is verified with site-specific validation.

Renovation roof drain installed inside the old roof drain

- Made of acid-resistant steel or copper.
- Drains made of acid-resistant steel have primed flange.
- Includes a leaf grate.
- Outlet diameter should be 8-10 mm smaller than the inside diameter of the pipe in the old roof drain.
- UV-50 roof drains are renovated using drain PK.
- UV-70 and UV-80 roof drains are renovated using drain B.

Accessories

- Bitumen flange

Maintenance instructions

Check and clean the grate. Other maintenance needs according to the roof maintenance book.