


Vapor barrier roof drain

HSKS®



Other sizes are made to order

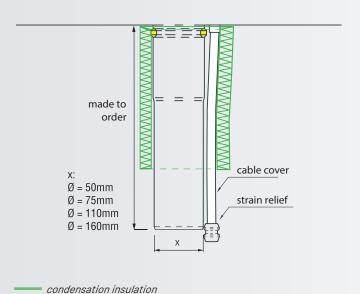

The European Committee for Standardisation CEN has not defined a harmonised standard (hEN) for roof drains that would allow the product to be <u>CE marked</u>. The product suitability is verified with site-specific validation.

Roof drain installed in the vapor barrier

- Made of acid-resistant steel.
- Flange is primed.
- Includes a passing-through bushing and cover for the roof drain thermocable. Cable cover has a strain relief.
- Actual roof drain is chosen to be compatible with the adaptor of HSKS® (50, 75, 110 tai 160 mm). Adaptor includes a lip sealing.

Accessories

- Condensation insulation (13 mm cellular rubber)
- Bitumen flange



