

Yard drain 500/670, 40t
Yard deck with concrete slab

PK-01

Date
16 Sep 2024

Scale
1:10

 PELTITARVIKE

Order/quote

Peltitarvike Oy

Myynti@peltitarvike.fi, +358 20 741 2770

Yard drain 500/700

h1 = Made to order

h2 = Made to order

h3 = Made to order

d4 = Made to order

d5 = Made to order



h6 = Made to order

Accessories

Condensation insulation 13 mm, 19 mm or 32 mm

Thermocable

Cast-iron frame Ø670 mm
Cast-iron grating Ø 500 mm
Load capacity 40 t

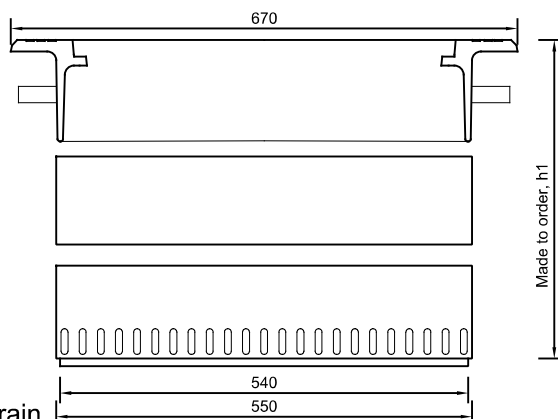

Made to order, h1

Height adjustment
with adjustable extension ring

Screen structure for yard drain
500/700, acid-resistant steel

Cast-in supports

Opening for bottom section of yard drain

Bottom section of yard drain,
acid-resistant steel

Made to order
d5, Recommendation: 540

Drain outlet with water trap
from bottom or side, d4
Standard diameters Ø75 mm,
110 mm, 160 mm

Accessories:
Condensation insulation
13 mm, 19 mm or 32 mm
+ Thermocable

1. Reinforced concrete slab according to structural plan.

2. Geotextile according to structural plan.

3. Thermal insulation according to structural plan.

4. Waterproofing according to structural plan.

5. Load-bearing structure according to structural plan.

Electrical cable for thermocable

Made to order, h6

Made to order, h3

Made to order, h2